



HBG

Misting Tube



Standard Sizes:

Inch"	MM
3/16"	2.3 x 5
1/4"	3.3 x 6.35
3/8"	5 x 9.52
1/2"	6.7 x 12.7

Technical DATA / Physical Properties:

Temperature range -40°C / +100°C (-40°F / +194°F)

Working pressure 70-80 bar at 23C

Burst pressure 140 bar at 23C

Tolerance: 3 mm - 20 mm: (+/-0.10mm)

Raw Material Properties - Polyamide 12 (Nylon 12)

Density: 1.02 g/cm3

Shore - D Hardness 67 D

Melting Point 173 °C

Water Absorption 1.4 %

Moisture Absorption 0.7 %

High impact resistance

at low temperatures

UV and heat stability

High pressure resistance

Weathering resistance

Easy to use with fittings

Hydrolysis resistance


Excellent diameter sensitivity

Marking can be apply on tube.

Packing can be changeable with customers request.

(Roll size or cutting straight tube, with or without reels)

We can produce custom colors with customer request.

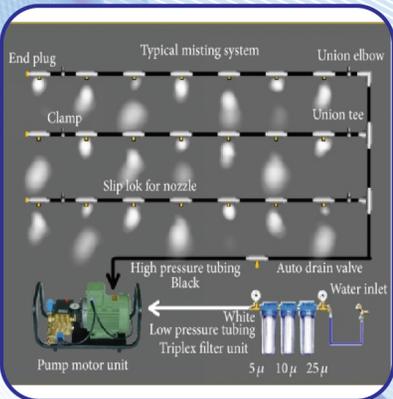

ARASTA MAKINE KIMYA SAN. TIC. LTD. STI.

Tekstilkent B 16-9 Esenler - Istanbul 34235 TURKEY Phone: +90 850 333 27 72 Mobile: +90 532 600 27 72
www.mistingtubes.com - info@arastald.com.tr